


Changes made since Public Meeting 1 (July 27, 2023)

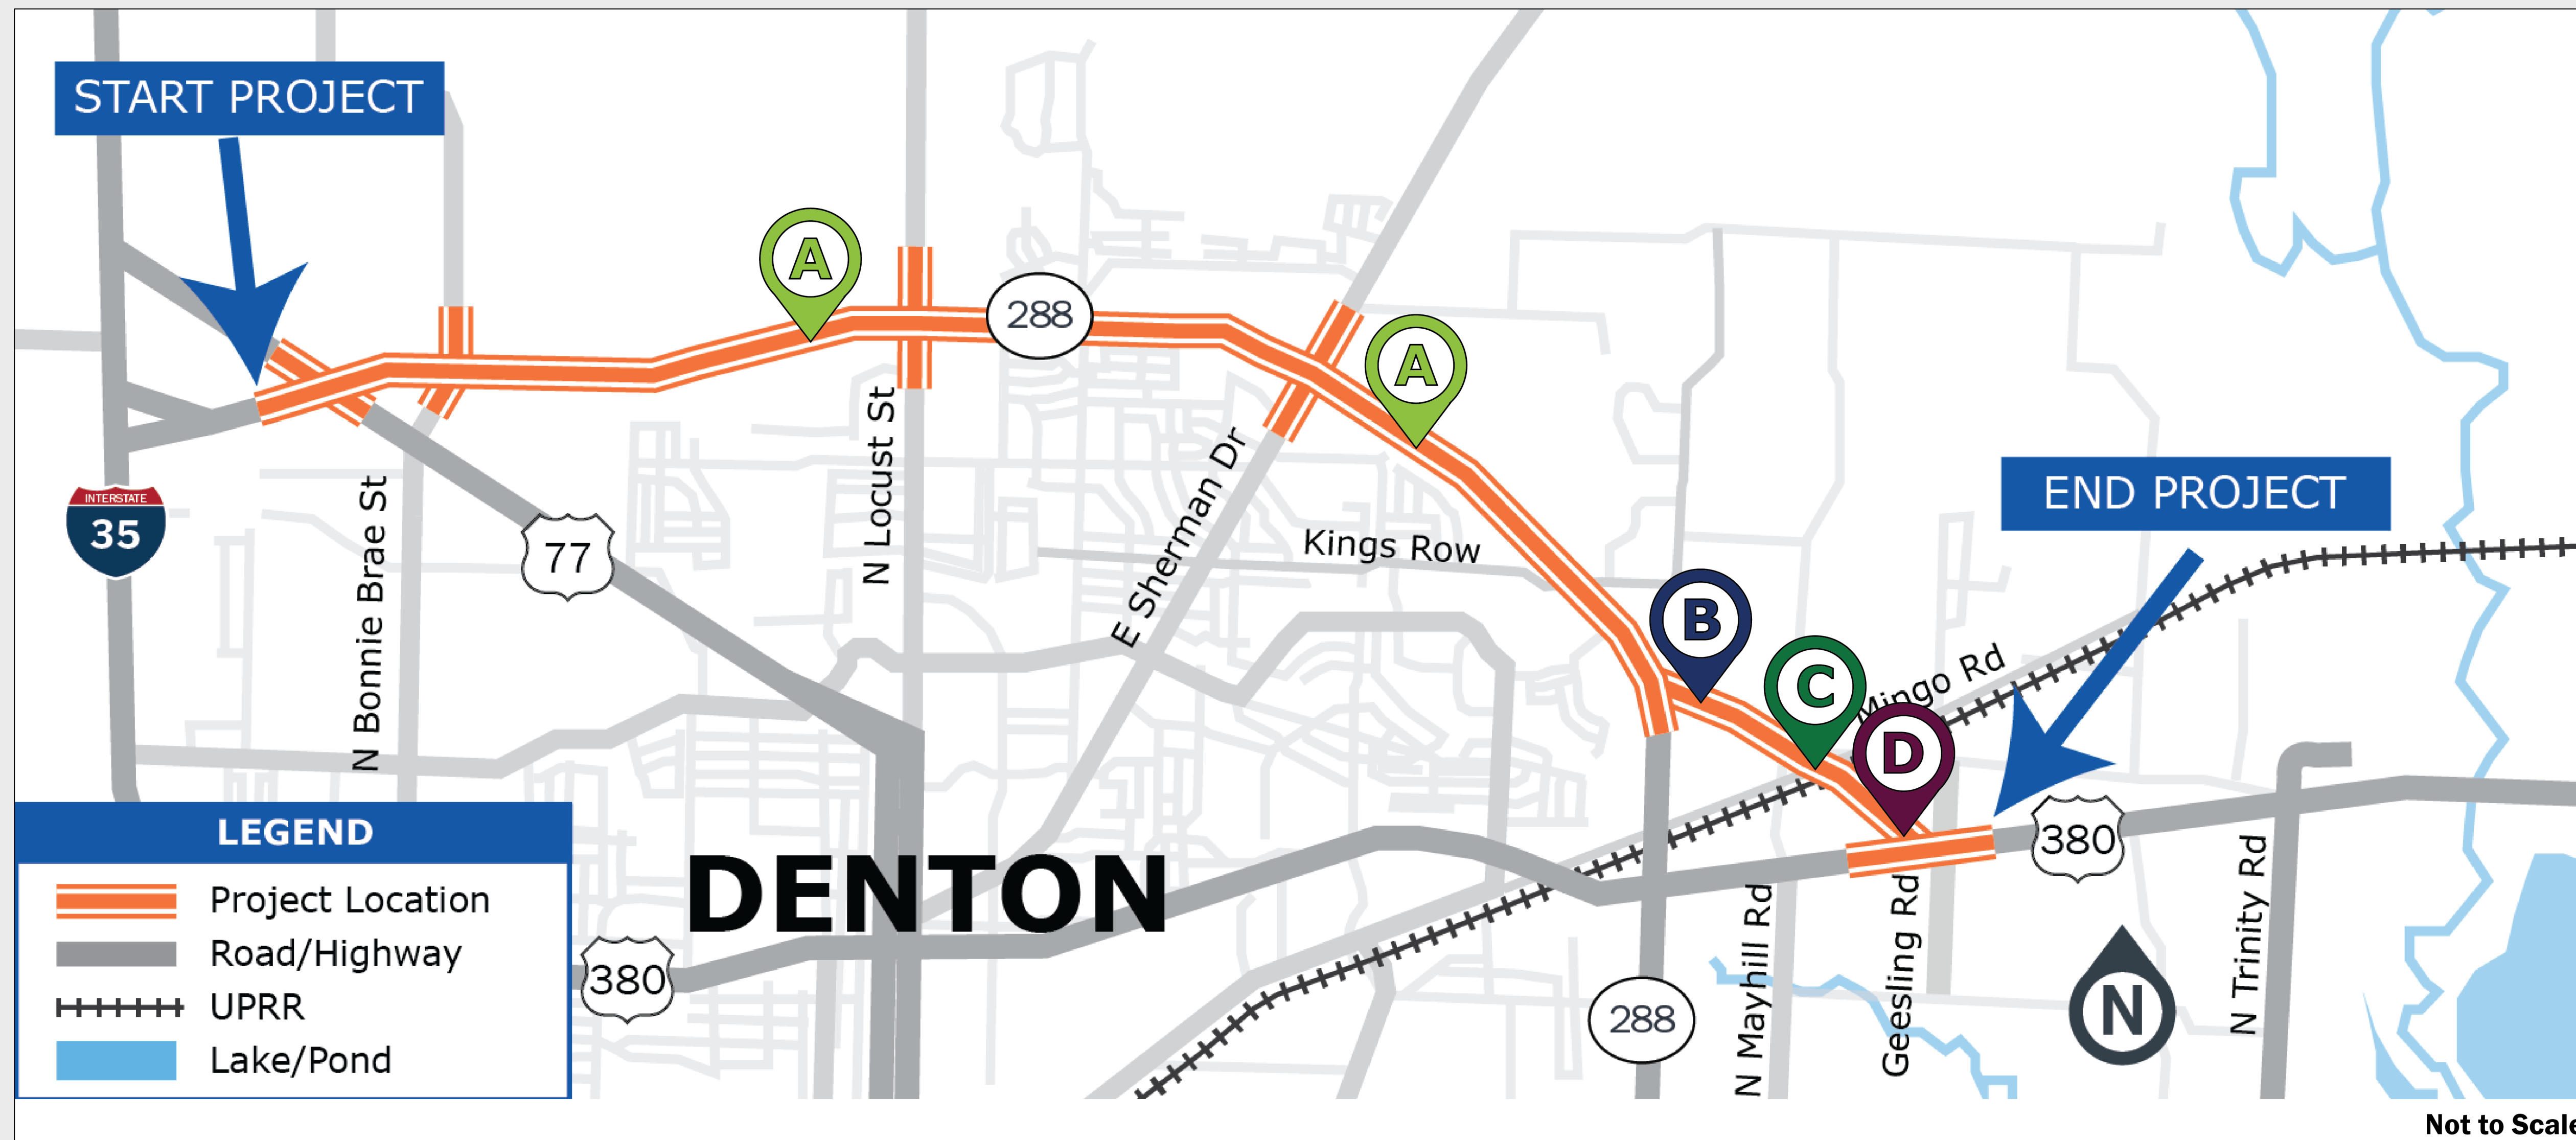

A: FM 428 (Sherman Drive) Ramps

- Sherman Drive braided ramp removed and extended exit ramp through Locust Street to access Sherman Drive
- Entrance and exit ramps reversed to allow for westbound exit and eastbound entrance to SL 288 for better access and operations

C: Connector Revisions

Frontage road and access eliminated from Kings Row to US 380 for safety and improved connectivity

B: Kings Row/Windsor Drive

Kings Row through-connection eliminated, new Kings Row connection made by extending Deerwood Parkway and Windsor Drive to the SL 288 at-grade intersection east

D: Connector Alignment

Revised schematic alignment closer to the original feasibility study alignment is selected to move forward for schematic design to minimize home and business displacements